

SpeedFace -V5

Starter Facial Recognition Terminal with 5-inch Touch Display



Proactive Facial Recognition



New Height of Anti-Spoofing



Speedy Recognition



Wide Pose Angle Acceptance



Touchless for Better Hygiene





Features

- Enhanced Visible Light Facial Recognition with Deep Learning built-in
- Multiple verification with Fingerprint, RFID and Facial Recognition
- 5-inch touch LCD
- Dual-camera for real-time face detection
- 6,000 face templates capacity
- Recognition distance: 0.3 - 3 m
- Compatible with external RS232, RS485 and Wiegand reader
- TCP / IP, Wi-Fi communication

Recognition distance up to 3m long and extra wide angle recognition

The recognition distance has been greatly extended up to 3 meters long, which significantly improves maximum traffic rate. While most of algorithms only support 15-degree angle facial recognition, ZKTeco supports 30-degree angle facial recognition.

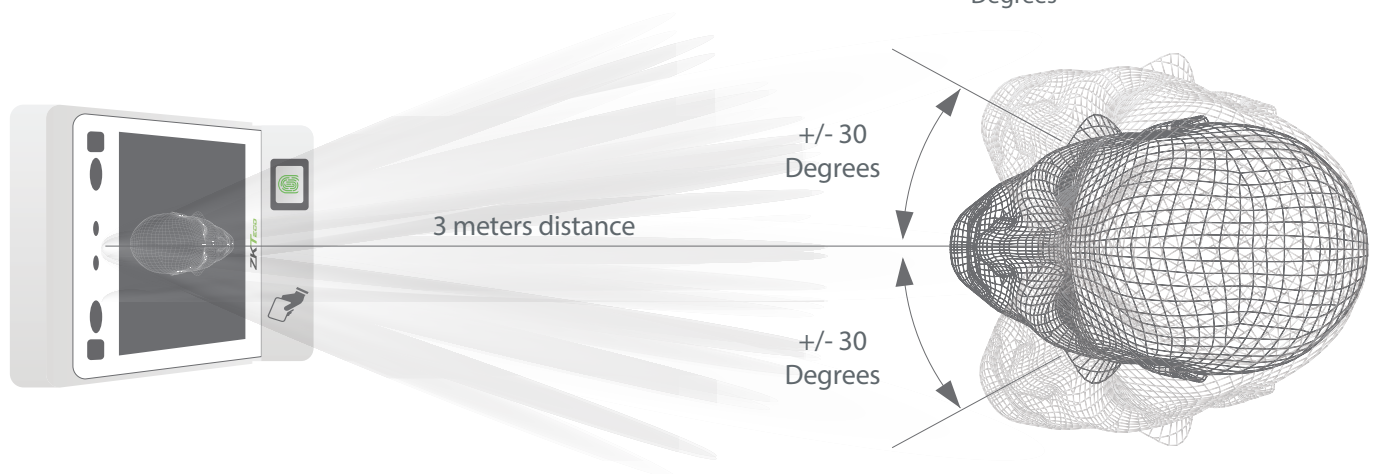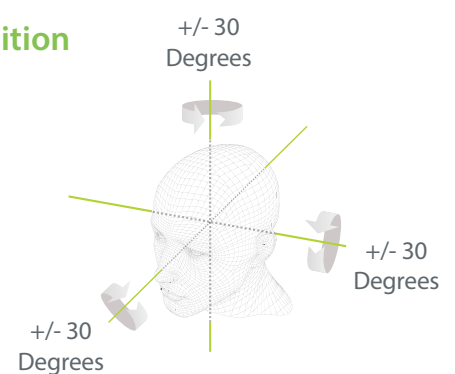

Specifications

| | | |
|-----------|---------------|--|
| | Model | SpeedFace-V5 |
| Hardware | LCD | 5-inch touch screen |
| | CPU | Quad-core A17 1.8GHz |
| | Memory | 2G RAM / 16G ROM |
| | Camera | 2MP dual lens |
| | Communication | TCP / IP, Wi-Fi (optional) RS232, RS485 for external reader Wiegand Input/Output |
| | Accessory | Door lock, door sensor, alarm, exit button and auxiliary input |
| | Audio | Loudspeaker |
| Capacity | Users | 100,000 |
| | Face Template | 10,000 |
| | Fingerprint | 50,000 |
| | RFID | 100,000 |
| | Log | 2,000,000 |
| Operating | Voltage | 12V 3A |
| | Temperature | -10°C ~ 45°C |
| | Humidity | 10% ~ 90% |
| | Software | ZKBio Access IVS |

Optional Accessories



RS485
Fingerprint Reader



RFID Reader



Exit Button



Electric Lock



Alarm



Sensor

Dimensions (mm)

